


FEATURES

- Steel and brass laminated top plate.
- Poles are individually magnetized.
- Double magnet system for maximum power.
- Use of ferrite magnets ensures that the magnetic force will not reduce even on long use.
- Low magnetic field: no magnetization of tools.
- Smooth and simple actuating mechanism.
- Rugged construction: exceptional longevity.
- Holding power - 14 kg/cm².
- Low flux height of 6mm

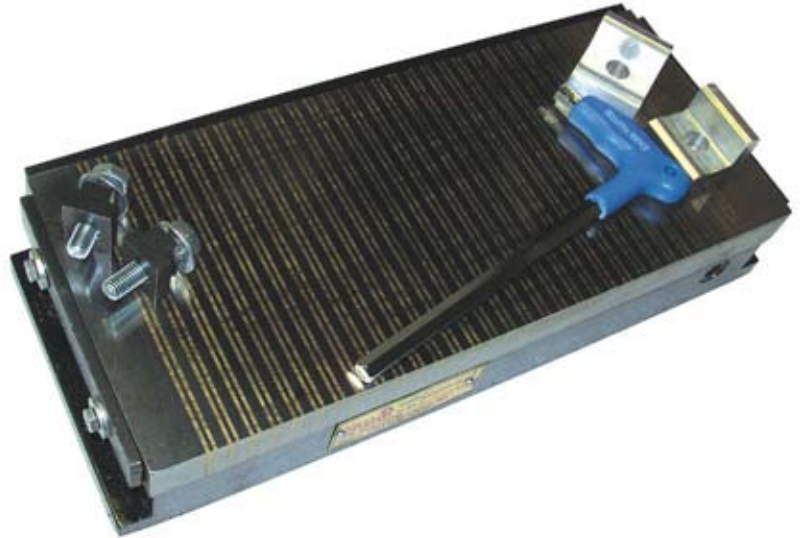

APPLICATIONS

- Ideal for grinding / EDM applications
- Provides powerful holding for medium and thick work pieces.
- Suitable for all kinds of job sizes / thickness.

Product Code : FEG

All dimensions are in mm.

| PART NO | TOP PLATE | | POLE PITCH | HEIGHT |
|---------|-----------|-----|---------------------|--------|
| | L | W | | H |
| 1811 | 180 | 115 | 10 (5+1.5+2+1.5) | 70 |
| 2115 | 215 | | | |
| 2613 | 260 | | | |
| 2813 | 280 | | | |
| 3115 | 315 | | | |
| 2815 | 280 | 155 | | 73 |
| 3113 | 315 | | | |
| 3615 | 360 | | | |
| 4115 | 415 | | | |
| 4615 | 460 | | | |
| 5015 | 500 | 200 | | 75 |
| 6115 | 610 | | | |
| 2820 | 280 | | | |
| 3120 | 315 | | | |
| 3620 | 360 | | | |
| 4120 | 415 | | | |
| 4620 | 460 | | | |
| 5020 | 500 | | | |
| 6120 | 610 | | | |
| 8020 | 800* | | | |
| 10020 | 1000* | | 80 | |

Larger (*) size chucks are made with two operating handles. Due to continuous upgradation in design there could be changes in specification. Other sizes on request. Before ordering, contact Lifton Magnets or your nearest dealer to confirm the suitability of this model for your application.

